## WTORA-MAX WALKIE TUGGER

EDUTORA-MAX

30

2TWT22

## **EXX TORA-MAX**

#### TORA-MAX 2TWT22

сарас <b>2,200</b>		BATTERY <b>24V</b>	TRAVEL SPEED (FULL LOAD) <b>2.8 MPH.</b>
INDUSTRIES			
Airport	General Manufacturing	g General Warehousi	ing Distribution
Food Storage	Retail		

## STANDARD EQUIPMENT

#### PERFORMANCE

- 24 Volt Electrical System
- DC Drive Controller
  with Thermal Protection & Current Limiting
- Transistor Drive Control System
- Regenerative Braking

#### **BODY/EXTERIOR DESIGN**

- Rubber Drive Tire (non marking)
- Polyurethane Caster Wheels
- External Battery Charger
- Exchangeable 24V Lithium Ion Battery
- Pin Code Access

#### **OPERABILITY & ERGONOMICS**

- Multifunction Control Handle
  with Ergonomically Angled Hand Grips
- Fingertip Control of All Functions
- Directional Thumb Wheels
- Adjustable Tiller Height

### **OPTIONAL EQUIPMENT**


Extra LIB 24V36AH

- Contactor-less Drive Controls
- Anti-roll Back System
- Fused Control and Power Circuits
- High Ground Clearance
- RFID Card Access
- Adjustable Height Swivel Castors
- Stepless Adjustable Hitch Height
  with Manual Coupling
- Parking Brake
  Electromagnetic Brake
- Turtle Speed Button
- LCD Battery Discharge Indicator
  with Hourmeter

GENERAL	ATA			2TWT22
Load Capac	city		lb (kg)	2200 (1000)
Power Type	}			Battery
Operator Position				Walkie
Tire Type		Drive/Load		Rubber/Polyurethane
Wheels ( x = driven)Front/Rear		Front/Rear		2/2
EXTERIOR	DIMENSIONS <sup>1</sup>			2TWT22
A Overall Width			in (mm)	19.8 (503)
B Overall Length			in (mm)	36 (915)
C Wheelbase			in (mm)	12.8 (325)
D Turning Radius			in (mm)	22 (560)
E Control Handle Height Fully Raised		Fully Raised	in (mm)	45.3 (1150)
F Control	l Handle Height	Fully Lowered	in (mm)	29.5 (750)
G Ground Clearance (center of wheelbase)		elbase)	in (mm)	1.4 (35)
Gross Weight without Battery			lb (kg)	147.7 (67)
Axle Loading (No Load) Front/Rear		Front/Rear	lb (kg)	121.3 (55) / 42 (19)
PERFORMA	ANCE DATA			2TWT22
Travel Speeds Full Load No Load		Full Load	mph (km/h)	2.8 (4.5)
		No Load	mph (km/h)	3.0 (4.9)
Drawhar Pull		Continuous	lb-ft (N)	45 (200)
		Maximum	lb-ft (N)	124 (550)
Tires	Number	Drive/Caster		2/2
	Size	Drive	in (mm)	9.8x3.1 (250x80)
	(dia. x width)	Caster	in (mm)	3x1.3 (75x32)
Tread	I	Caster/Drive	in (mm)	7.3 (185) / 15.2 (385)

POWER SYSTEM			2TWT22
Battery	Voltage/Amps	V/AH	24/36
	Weight	lb (kg)	16.8 (7.6)
Electric Motors	Drive	hp [kW]	.54 [0.4]
Control Type	Drive		DC - Speed Control

#### **EXTERIOR DIMENSIONS**

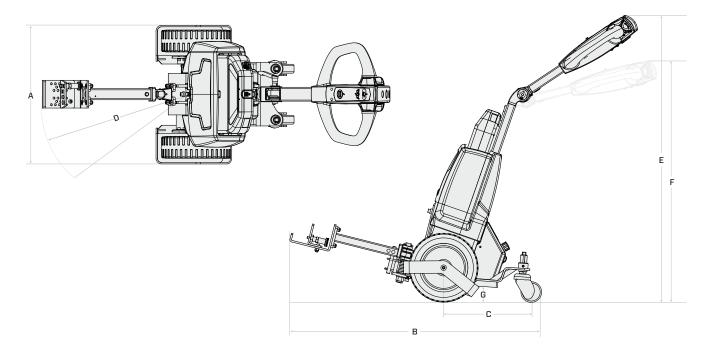

#### shop.toyotaforklift.com

# ZOTORA-MAX

2TWT22SS ©2024 TORA-MAX

#### shop.toyotaforklift.com

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.